TECHNICAL DATA SHEET

Product Code.:

C1040

Product Name.:

FLOORABRIGHT

Product Description.:

Coloured EPDM Rubber Granulate

Granule Size.:

1.0mm - 4.0mm



Trade Partners International Ltd

6 Reynolds Drive Wollaton Nottingham NG8 1HE

Tel.: + 44 (0) 115 8229473 email.: info@trade-partners.net web.: www.trade-partners.net

Physical Properties

Base Polymer Ethylene Propylene Diene Rubber (EPDM) > 20%


Hardness 60 ± 5 Shore AISO 48: 1994Tensile Strength> 6.0 MpaBS ISO 37: 2005Elongation at Break≥ 650%BS ISO 37: 2005

Density $1.60 \pm 0.05 \text{ g/cm}^3$ ISO 2781

Colour Stability 3-5* EN 20105-A02 * colour dependent

All properties derived from independant testing.

Sieve Analysis

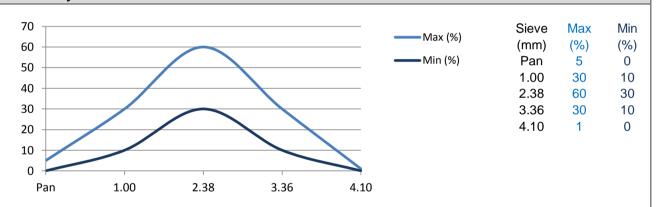

Packing & Storage

Floorabright is packed in 25kg clear polythene bags and palletised to suit individual order requirements. The maximum quantity per pallet is 40 x 25kg bags, totalling 1,000kgs, The unit sizes for transportation are:

1 x 25kg bag = 600mm x 400mm x 150mm 1 x 1,000kg pallet = 1000mm x 1200mm x 1600mm

For most applications Floorabright should be kept dry and indoor storage is recommended. Although the product has no shelf life, we advise that any old material is used first. In the event of different batches being applied in the same installation then both batches must be thoroughly mixed first.

Applications

Floorabright can be used for a variety of different applications including .:

Playground Surfacing Walkways Moulded Products

Sports Surfacing Equestrian Arena's Underlay

Other

Floorabright may be cleaned using water plus a natural detergent if necessary. Contact with solvents, oils and fuels should be avoided. These recommendations apply for the pure granulate, the customer should ensure that any special cleaning agents are compatible with their complete system if necessary.

This Techincal Data Sheet must be read in conjunction with the Material Safety Data Sheet

The company maintains a policy of continuous research and development to improve products and reserves the right to alter this Technical Data Sheet without notice. Customers should check with the company that they have the latest information.