

# TECHNICAL DATA SHEET



**Trade Partners International Ltd**  
6 Reynolds Drive  
Wollaton  
Nottingham  
NG8 1HE  
Tel.: + 44 (0) 7989 414811  
email.: info@trade-partners.net  
web.: www.trade-partners.net

## Product Code.:

**B1040R**

## Product Name.:

**FLOORABRIGHT**

## Product Description.:

**Black Recycled EPDM Rubber Granulate**


## Granule Size.:

**1.0mm - 4.0mm**

## Physical Properties

Base Polymer	Ethylene Propylene Diene Rubber (EPDM)	
Hardness	85	ISO 48: 1994
Tensile Strength	5.86	BS ISO 37: 2005
Elongation at Break	685%	BS ISO 37: 2005
Ash Content	61.9%	EN ISO 3451-1

## Sieve Analysis

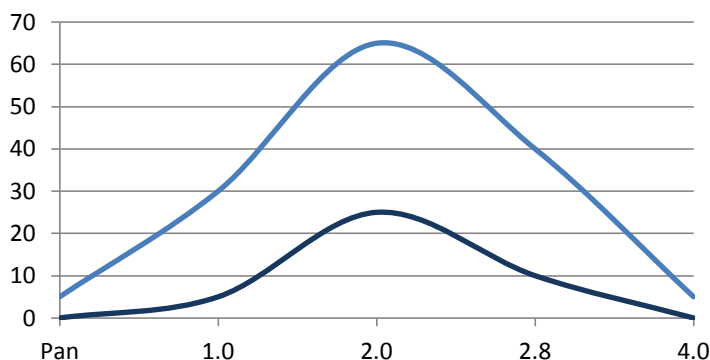

Sieve (mm)	Max (%)	Min (%)
Pan	5	0
1.0	30	5
2.0	65	25
2.8	40	10
4.0	5	0

## Packing & Storage

Floorabright is packed in 25kg white polythene bags and palletised to suit individual order requirements.

The maximum quantity per pallet is 40 x 25kg bags, totalling 1,000kgs, The unit sizes for transportation are:

1 x 25kg bag = 600mm x 400mm x 150mm (0.036m<sup>3</sup>)

1 x 1,000kg pallet = 1200mm x 800mm x 1700mm (1.632m<sup>3</sup>)

For most applications Floorabright should be kept dry and indoor storage is recommended. Although the product has no shelf life, we advise that any old material is used first. In the event of different batches being applied in the same installation then both batches must be thoroughly mixed first.

## Applications

Floorabright can be used for a variety of different applications including.:

Playground surfacing

Walkways

Moulded Products

Sports surfacing

Equestrian Arena's

Underlay

## Other

Floorabright may be cleaned using water plus a natural detergent if necessary. Contact with solvents, oils and fuels should be avoided. These recommendations apply for the pure granulate, the customer should ensure that any special cleaning agents are compatible with their complete system if necessary.

***This Technical Data Sheet must be read in conjunction with the Material Safety Data Sheet***

The company maintains a policy of continuous research and development to improve products and reserves the right to alter this Technical Data Sheet without notice. Customers should check with the company that they have the latest information.